


Pneumatischer Spannkopf Pneumatic clamping chuck



Typ	A	D	X	N	Kolbendurchm. (mm) <i>Piston diameter (mm)</i>	Spannbereich (mm) <i>clamping range (mm)</i>	max Rollengew. (kg) <i>max roll weight (kg)</i>	übertragbares Drehmoment [Nm] <i>transferable torque [Nm]</i>
70-76,2	156	200	180	8	154	68-79	2500	330
70-76,2	175	220	200	10	172	68-79	2600	420
70-76,2	194	240	220	12	192	68-79	2600	530
3"	156	200	180	8	154	74-84	2500	340
3"	175	220	200	10	172	74-84	2800	430
3"	194	240	220	12	192	74-84	2800	550
4"	156	200	180	8	154	98-108	2500	470
4"	175	220	200	10	172	98-108	3200	600
4"	194	240	220	12	192	98-108	4040	760
5"	156	200	180	8	154	123-133	2500	590
5"	175	220	200	10	172	123-133	3200	740
5"	194	240	220	12	192	123-133	4040	930
6"	156	200	180	8	154	148-158	2500	700
6"	175	220	200	10	172	148-158	3200	900
6"	194	240	220	12	192	148-158	4040	1140

ADAPTER

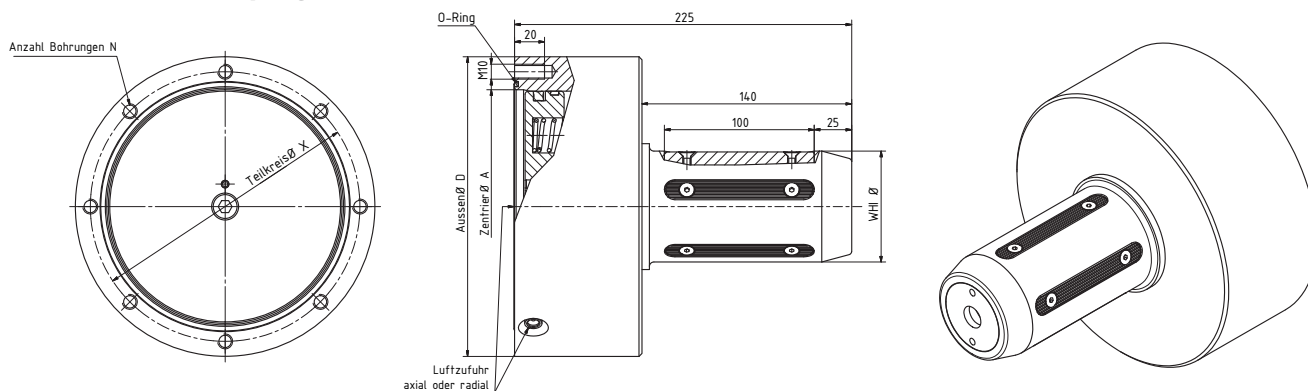