


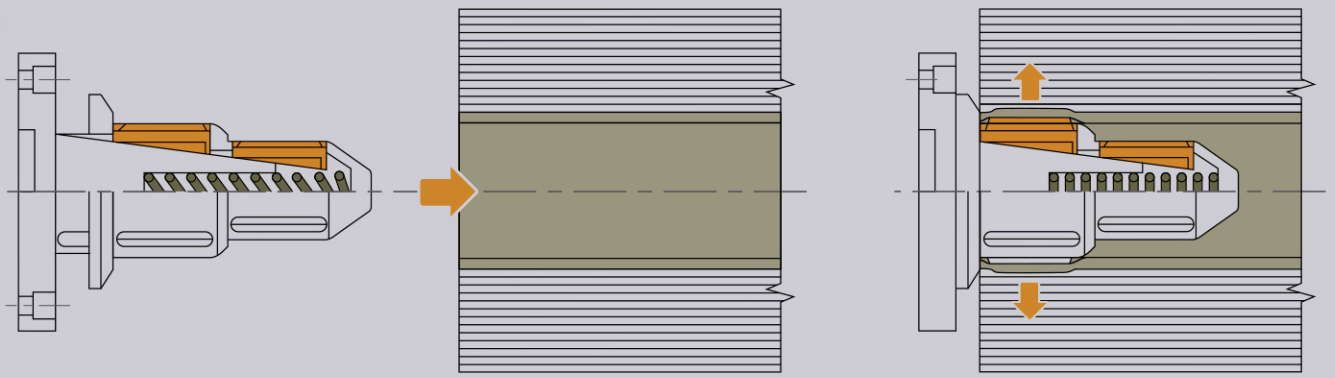

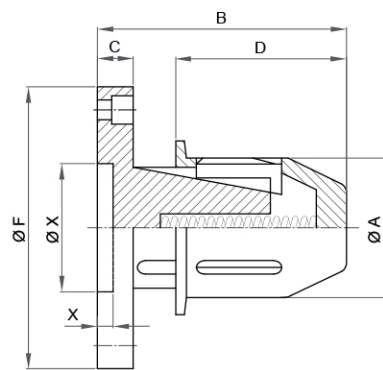
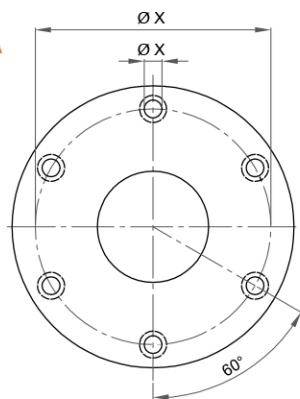


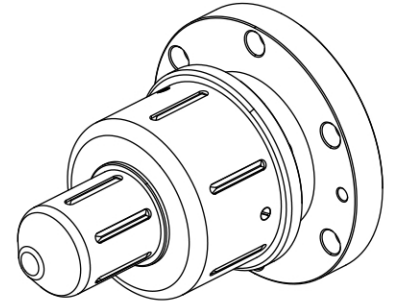

TM / A

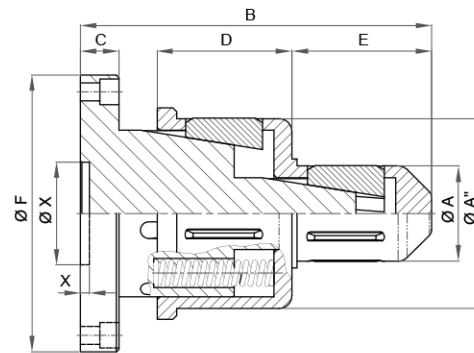

TM / B

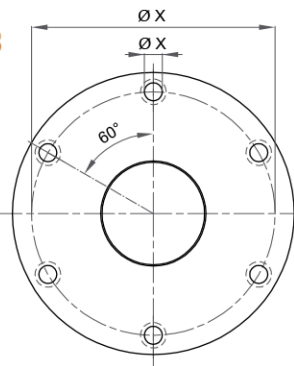

TM/A	A mm	B mm	C mm	D mm	F mm	max Rollengew. (kg) max roll weight (kg)	Drehm. (Nm) torque (Nm)	X
3"	74,5	175	25	120	198	1200	250	auf Anfrage on customer's request
4"	98	175	25	120	198	2700	1100	
5"	125	165	30	105	216	5000	2500	
6"	148	165	30	105	216	7500	3000	
12"	301	165	30	105	418	15000	18000	

TM/B	A / A'' mm	B mm	C mm	D mm	E mm	F mm	max Rollengew. (kg) max roll weight (kg)	Drehm. (Nm) torque (Nm)	X
3" / 4"	74,5 / 98	235	25	80	100	198	750 / 2500	250 / 1100	auf Anfrage on customer's request
3" / 6"	74,5 / 148	274	30	105	109	216	1500 / 7500	250 / 3000	
4" / 6"	98 / 148	274	30	105	109	216	2700 / 7500	1100 / 3000	